


Connecting the Parallel Jumper Cables

To increase the running time of your system, two batteries can be connected together. Ideally the batteries should be of similar age and capacity. Connecting an old and new battery together will not allow for proper charging. Specific connection instructions are explained below. For additional safety information and instructions please see instruction manual. Please not all systems can accommodate two batteries.

1. Unplug the system from the wall
2. Place one battery next to the controller. This will be considered **Battery A**
3. The red wire with the **positive (+)** sticker should be placed on the **positive (+)** terminal of both batteries. Tighten the bolt on to the **positive (+)** side of **Battery B**. Now attach the **positive (+)** wire from the controller to the **positive (+)** post of **Battery A**, and tighten the bolt securing both wires
4. The black wire should be placed on the **negative (-)** terminal of both batteries. Tighten the bolt on the **negative (-)** side **Battery B**. Now attach the **negative (-)** wire from the controller to the **negative (-)** post of **Battery A**, and tighten the bolt on both wires
5. Plug the control unit back into a grounded AC wall outlet
6. The system will monitor and charge both batteries. No external charger is needed for the battery

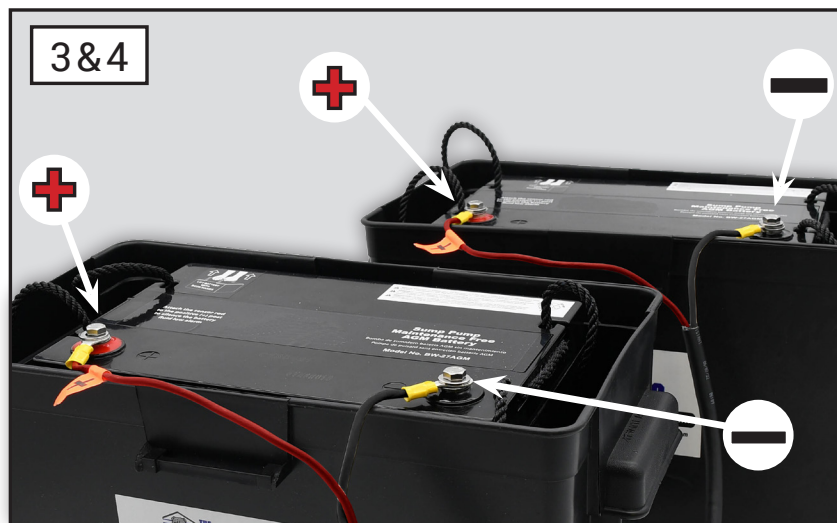

If you have any questions please contact the Glentronics Service Team at 800-991-0466 option 3 or service@glentronics.com