




Congratulations on your purchase of a Basement Watchdog battery!

Please note: The yellow cap comes with the Basement Watchdog System. If you have any questions, concerns or need a **free** replacement for the yellow battery cap please call Glentronics, Inc. at 800-991-0466, option 3 or email us at mail@glentronics.com.

To help prolong the life of the battery, please follow the following steps:


Also see the instruction manual for further details and important safety precautions.

① Check fluid levels every 4-6 months

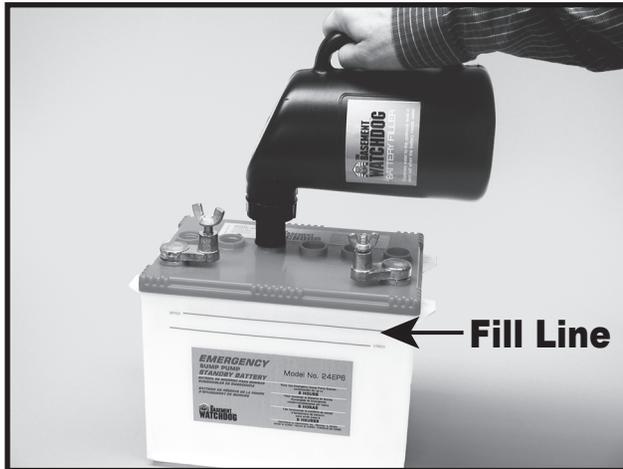


- ❖ When fluid levels are low, add distilled water to the top fill line
- ❖ **DO NOT** add more acid after the initial installation date


② Clean the underside of yellow cap

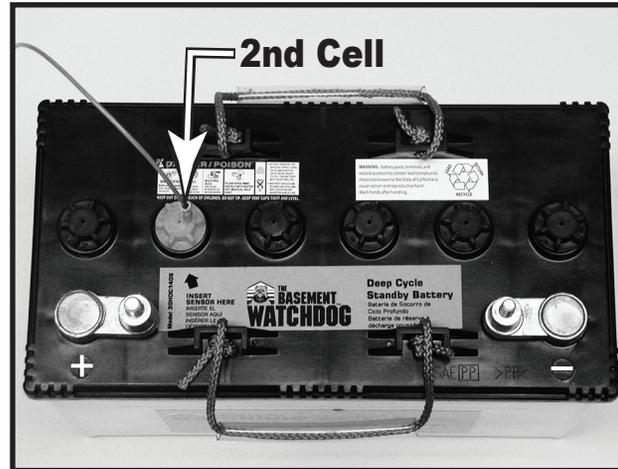

- ❖ Included with the Basement Watchdog system is a yellow battery cap
 - ◆ This yellow cap is to be placed on the second cell from the positive post
 - ◆ When checking fluid levels, rinse the yellow cap under running water

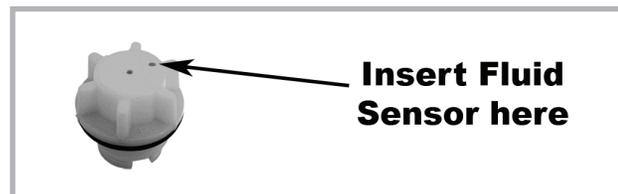

③ Clean the battery terminals

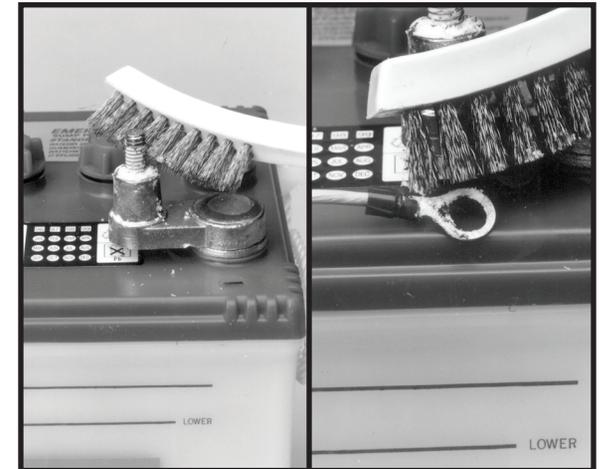

- ❖ Clean any corrosion off of the ring posts and ring connectors on the ends of the battery wires
 - ◆ Use a stiff brush or sandpaper
 - ◆ DO NOT apply corrosion resisting sprays or pads to the terminal rings or posts after you have cleaned them, since this could prevent the battery from charging properly